


► 951 - 961 Cam Locks





Passed ANSI/BHMA
A156.11 Grade 2
cycle test

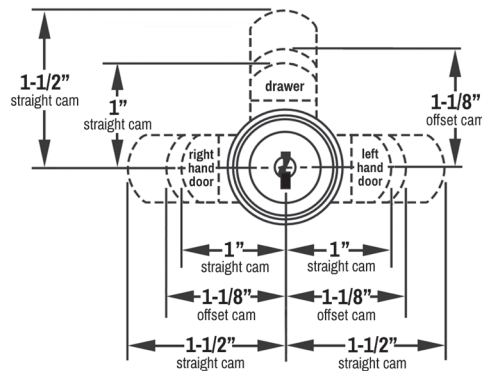

Dimensional offset of 1-1/8" cam is 11/32"

| Item | Finish | Cylinder Length | Maximum Material Thickness | Inner Box Quantity | Case Quantity |
|------|-----------|-----------------|----------------------------|--------------------|---------------|
| 951 | 14A, US19 | 7/16" | 7/64" | 15/box | 120/case |
| 952 | 14A, US19 | 5/8" | 15/64" | 15/box | 120/case |
| 954 | 14A, US19 | 15/16" | 5/8" | 15/box | 120/case |
| 953 | 14A, US19 | 1-3/16" | 7/8" | 15/box | 120/case |
| 955 | 14A, US19 | 1-7/16" | 1-1/8" | 15/box | 120/case |
| 960 | 14A, US19 | 1-3/4" | 1-7/16" | 15/box | 120/case |
| 961 | 14A, US19 | 2" | 1-13/16" | 15/box | 120/case |

| Item | Cylinder Length/ Straight Cam (Y) | Max. Mat. Thickness (A) | Inbent Cam (X) | Outbent Cam (Z) |
|------|--------------------------------------|-------------------------|----------------|-----------------|
| 951 | 7/16" | 7/64" | 3/32" | 25/32" |
| 952 | 5/8" | 15/64" | 9/32" | 31/32" |
| 954 | 15/16" | 5/8" | 19/32" | 1-9/32" |
| 953 | 1-3/16" | 7/8" | 27/32" | 1-17/32" |
| 955 | 1-7/16" | 1-1/8" | 1-3/32" | 1-25/32" |
| 960 | 1-3/4" | 1-7/16" | 1-13/32" | 2-3/32" |
| 961 | 2" | 1-13/16" | 1-21/32" | 2-11/32" |

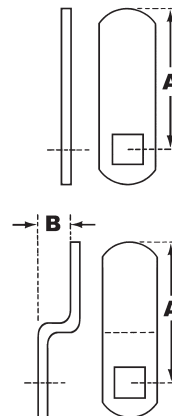

KEYBLANKS, CUT KEYS, KEYING KIT

| Item | Description |
|---------------|--|
| KB-D85-C-NP | Key blank (for NON-MK locks) |
| KB-D85-C-CUST | Custom cut change key (for NON-MK locks) |
| KB-D83-D-NP | Key blank (for MK locks) |
| KB-D83-D-CUST | Custom cut change key (for MK locks) |
| KB-D84-E-MK | Cut master key E41A (for MK locks) |
| KB-D85-XXXX | Cut key for stock KA XXXX [where XXXX = KA key code] |
| D1 | DISC Keying Kit (KA/KD/MK) |

** P95-CM-6 and P95-CM-2 are included standard with 951-952 locks. P95-CM-1 and P95-CM-2 are included standard with 953-961 locks. All other cams are available separately.

SPECIFICATIONS

Keying: Will key together with CompX National disc tumbler locks
Assembly: Ships with body and cylinder assembled for fast and easy installation
ANSI/BHMA: Passed ANSI/BHMA Grade 2 cycle test: 20,000 cycles, including key insertion and removal [E07262]
US Patents: 11,959,316; D1016604
Body: Zinc die cast
Cylinder: Zinc die cast, 5 disc tumbler
Standard function: 90 degree cam rotation, key removable in locked and unlocked position
Key retaining: Key removable in the locked position only (available for an upcharge).
Cams: Ships with one straight and one offset cam
Spur Washer: Ships with anti-rotation, eyelet spur washer (which can be locked into place for a more secure mounting)
Finish: 14A (bright nickel) or US19 (matte black)
Packaged: Packed 15 per box, 120 per case

KEYING INFORMATION

Keyway: Cascade Series (equivalent to National 5-disc system)
Keys: Includes 2 keys per lock
Stock keying: KA, KD or MKKD [NOTE: stock KD/MKKD max 120 codes. [Max 380 KD/MKKD codes if custom keyed]
Stock KA#: C346A, C390A, C413A, C415A, C420A, C452A
Custom keying: MKKA and/or MKKD to schedule
Engraving: Lock face engraving with key code available (with upcharge)

Keyblanks:

KB-D85-C-NP Key blank (for NON-MK locks)
 KB-D83-D-NP Key blank (for MK locks)

Keying Kit:

D1 Disc tumbler keying kit for KA, KD and MK

INCLUDED ACCESSORIES

P95-SPW - eyelet spur washer *Patent Pending*
 P95-FN-Z - fixing nut
 P95-TR - trim ring
 P95-CS - cam screw with star washer
 P95-RS - retainer staple

INCLUDED CAMS

951-952: P95-CM-6 (1" straight cam) and P95-CM-2 (1-1/8" long with 11/32" offset cam)
 953-961: P95-CM-1 (1-1/2" straight cam) and P95-CM-2 (1-1/8" long with 11/32" offset cam)

OPTIONAL CAMS

| Part No. | Dim. A [length] | Dim. B [offset] | Description |
|-------------|-----------------|-----------------|-------------------|
| P95-CM-1 ** | 1-1/2" | - | Straight cam |
| P95-CM-3 | 3" | - | Straight cam |
| P95-CM-5 | 1-1/2" | - | Straight hook cam |
| P95-CM-6 ** | 1" | - | Straight cam |
| P95-CM-7 | 5/8" | - | Straight cam |
| P95-CM-2 ** | 1-1/8" | 11/32" | Offset cam |
| P95-CM-4 | 1-5/8" | 11/32" | Offset cam |



OLYMPUS
LOCK

Tel: 206.362.3290 | 800.525.0954
 Fax 206.362.3569 | www.olympuslock.com



The following warning is applicable to all parts listed on this page:
WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. for more information go to www.P65Warnings.ca.gov.