

829R-LC

LC Series: Schlage C Keyway Showcase/Ratchet Lock



*Complies with clause 6.3
(8.2~8.4) of ANSI/BHMA
A156.11 ANSI standards*

SPECIFICATIONS

Rekeyable: Easily rekeyable via set screw cylinder release mechanism

ANSI/BHMA: Complies with clause 6.3 (8.2~8.4) of ANSI/BHMA A156.11 ANSI standards

Use: Sliding glass or wood doors

Body: Zinc die cast

Strap: Steel

Finish: 26D

Packaged: Packed 10 per box

829R-LC CYLINDER INFORMATION

Cylinder: Not included

Includes: All parts necessary to work with other manufacturers' cylinders

Accepts: Schlage compatible key-in-knob cylinders including ILCO cylinder #1599 and Medeco cylinders

Medeco cylinders: Requires optional 829-MD Medeco Driver Pack (available separately.) Will accept the following Medeco cylinders:

Original: 6 pin #20-009S4
5 pin #20-008S4

Biaxial: 6 pin #20W009S4
5 pin #20W008S4

Keymark: 6 pin #20K009S4

Key retaining cylinder: #20W200S1

Compatible electronic cylinders: Medeco LOGIC, ASSA CLIQ or VIDEX CyberLock key-in-knob cylinders

INCLUDES

729RS-1 strap for 3/16" to 1/4" material thickness

OPTIONAL ACCESSORIES

Alternate straps: 729RS-2 strap for 3/8" material thickness, or 729RS-3 strap for up to 5/8" material thickness

Cylinder: 78-201 Series



US26D finish



WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



**OLYMPUS[®]
LOCK^{INC}**

829R-LC

LC Series: Schlage C Keyway Showcase/Ratchet Lock

ANSI/BHMA:
Complies with clause 6.3
(8.2~8.4) of ANSI/BHMA
A156.11 ANSI standards


OPTIONAL ACCESSORIES - See our website for a complete list of optional components.

Alternate straps (available separately)


All straps are 6" in length.

- 729RS-2 strap for 3/8" material thickness
- 729RS-3 strap for up to 5/8" material thickness

729RS-2 strap for 3/8" material



729RS-3 adjustable strap for 3/8" to 5/8" material

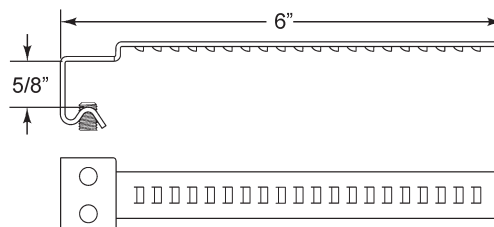

DIMENSIONS | TYPICAL INSTALLATION

