



951 - 961 Series

Disc Tumbler Cam Locks

SPECIFICATIONS

Keying: Will key together with CompX/National disc tumbler locks

Assembly: Ships with body and cylinder assembled for fast and easy installation

ANSI/BHMA: Passed ANSI/BHMA Grade 2 cycle test: 20,000 cycles, including key insertion and removal [E07262]

US Patents: 11,959,316; D1016604

Body: Zinc die cast

Cylinder: Zinc die cast, 5 disc tumbler

Standard function: 90 degree cam rotation, key removable in locked or unlocked position.

Cams: Ships with one straight and one offset cam

Spur Washer: Ships with anti-rotation, eyelet spur washer (which can be locked into place for a more secure mounting)

Finish: 14A (bright nickel) or US19 (matte black)

Packaged: Packed 15 per box, 120 per case

KEYING INFORMATION

Keyway: Cascade Series (equivalent to National 5-disc system)

Keys: Includes 2 keys per lock

Stock keying: KD (120 KD codes), MKKD (120 MKKD codes)

Stock KA#: C346A, C390A, C413A, C415A, C420A, C452A

Custom keying: MKKA or combination of MKKA/MKKD* to schedule (*NOTE: there are a maximum of 380 MKKD codes if custom keyed. If you require more key codes, see our DCN series pin-tumbler products.)

Keyblanks:

KB-D85-C-NP Key blank (for NON-MK locks)

KB-D83-D-NP Key blank (for MK locks)

INCLUDED ACCESSORIES

Keys - 2 change keys per lock

P95-SPW - eyelet spur washer *Patent Pending*

P95-FN-Z - fixing nut

P95-TR - trim ring

P95-CS - cam screw with star washer

P95-RS - retainer staple

P9-EXT** - plug extender (if required)

INCLUDED CAMS

951-952: P95-CM-6 (1" straight cam) and P95-CM-2 (1-1/8" long with 11/32" offset cam)

953-961: P95-CM-1 (1-1/2" straight cam) and P95-CM-2 (1-1/8" long with 11/32" offset cam)

OPTIONAL ACCESSORIES

P95-CM-1 - 1-1/2" straight cam

P95-CM-3 - 3" straight cam

P95-CM-4 - 1-5/8" x 5/16" offset cam

P95-CM-5 - 1-1/2" straight hook cam


P95-CM-6 - 1" straight cam

P95-CM-7 - 5/8" straight cam

Keyblanks - KB-D83/KB-D85

Keying Kit - D1

Cylinder Mounting Holes



WOOD

METAL

Eyelet spur washer to be used in wood applications only.

Passed ANSI/BHMA
A156.11 Grade 2
cycle test

New
Sizes



(US14A)
Bright Nickel



(US19)
Matte Black

Keying Options:

- KA key codes: C346A, C390A, C413A, C415A, C420A, C452A
- KD (120 KD codes), MKKD (120 MKKD codes)
- Custom Keying (MKKA or combination of MKKA/MKKD to schedule)
- 380 total MKKD codes available if custom keyed

Item	Finish	Cylinder Length	Maximum Material Thickness	Inner Box Quantity	Case Quantity
951	14A, US19	7/16"	7/64"	15/box	120/case
952	14A, US19	5/8"	15/64"	15/box	120/case
954	14A, US19	15/16"	5/8"	15/box	120/case
953	14A, US19	1-3/16"	7/8"	15/box	120/case
955	14A, US19	1-7/16"	1-1/8"	15/box	120/case
960	14A, US19	1-3/4"	1-7/16"	15/box	120/case
961	14A, US19	2"	1-13/16"	15/box	120/case

Item	Description
KB-D85-C-NP	Key blank (for NON-MK locks)
KB-D85-C-CUST	Custom cut change key (for NON-MK locks)
KB-D83-D-NP	Key blank (for MK locks)
KB-D83-D-CUST	Custom cut change key (for MK locks)
KB-D84-E-MK	Cut master key E41A (for MK locks)
KB-D85-C346A	Cut key for stock KA #C346A
KB-D85-C390A	Cut key for stock KA #C390A
KB-D85-C413A	Cut key for stock KA #C413A
KB-D85-C415A	Cut key for stock KA #C415A
KB-D85-C420A	Cut key for stock KA #C420A
KB-D85-C452A	Cut key for stock KA #C452A

Item	Description
D1	DISC Keying Kit (KA/KD/MK)



OLYMPUS
LOCK

206-362-3290 | 800-525-0954 | Fax 206-362-3569
www.olympuslock.com | info@olympuslock.com



New
Size

951

For 7/64" max.
material thickness

7/16"

New
Size

952

For 15/64" max.
material thickness

5/8"

954

For 5/8" max.
material thickness

15/16"

953

For 7/8" max.
material thickness

1-3/16"

955

For 1-1/8" max.
material thickness

1-7/16"

960

For 1-7/16" max.
material thickness

1-3/4"

961

For 1-13/16" max.
material thickness

2"

- ✓ **NOVEL DESIGN**
reduces install time and saves money
- ✓ **UNBEATABLE**
customer service, pricing, lead times
- ✓ **ENGINEERED**
to ensure and maintain industry-leading ship times
- ✓ **TESTED GRADE 2**
ANSI/BHMA grade 2 cycle test: passed 20,000 cycles, including key insertion and removal
- ✓ **KEYWAY COMPATIBILITY**
will key together with CompX National disc tumbler locks
- ✓ **CUSTOM KEYING**
orders will be expected to ship in 1 to 3 days
- ✓ **STOCK FINISHES**
US14A bright nickel
US19 matte black

Optional Cams


Straight Cams

Part No.	Dim. A [length]	Description
P95-CM-1 **	1-1/2"	Straight cam
P95-CM-3	3"	Straight cam
P95-CM-5	1-1/2"	Straight hook cam
P95-CM-6 **	1"	Straight cam
P95-CM-7	5/8"	Straight cam



Offset Cams

Part No.	Dim. A [length]	Dim. B [offset]	Description
P95-CM-2 **	1-1/8"	11/32"	Offset cam
P95-CM-4	1-5/8"	5/16"	Offset cam

** P95-CM-6 and P95-CM-2 are included standard with 951-952 locks.
P95-CM-1 and P95-CM-3 are included standard with 953-961 locks. All other cams are available separately.

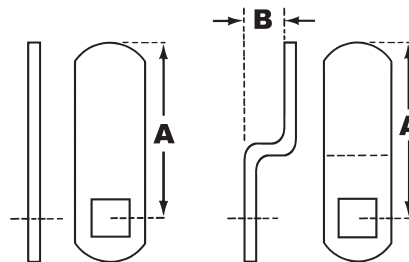

Stock
Finishes

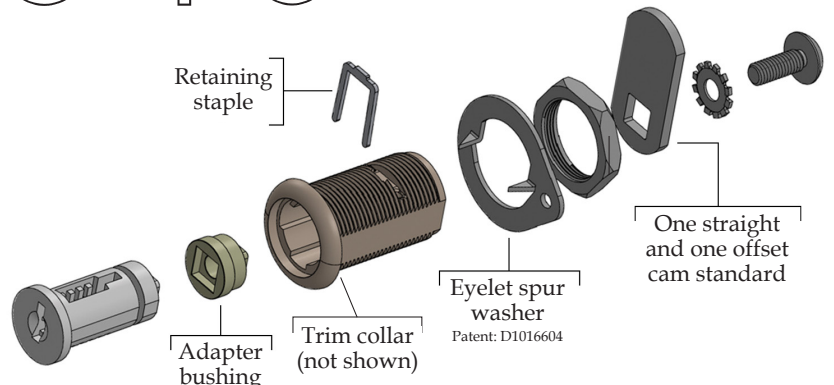

**OLYMPUS®
LOCK INC.**

206-362-3290 | 800-525-0954 | Fax 206-362-3569
www.olympuslock.com | info@olympuslock.com

2025-03