

Utility Cam Lock

▶ **B7** Cam Lock BES1 AVAILABLE KEYWAYS 2 **BEST Keyway** (non-SFIC) А В Ε E Ş 2 ኦ Κ L R J Woodwork Institute (WI) acknowledged product

MOUNTING CUTOUT Finish Item Keyway Cyl. Length* Keying Β7 26D 1-3/16" See chart O-Bit or Custom Keyed 3/4 *Cyl. Length: As measured with straight cam.



With Trim Collar	
For Mat. Thickness	7/8"
Straight Cam (X)	1-3/16"
Inbent Cam (Y)	7/8"
Outbent Cam (Z)	1-1/2"
Cylinder Length (A)	1-1/8"

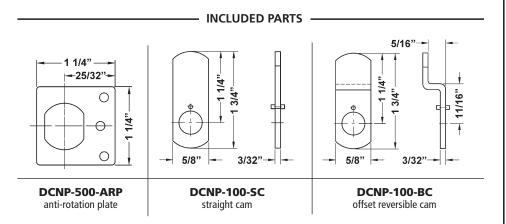

SPECIFICATIONS

Rekeyable: Patented cylinder retainer clip US Patent Nos: 5,038,589; 5,737,950 Retrofits: Best 5E

- Usage: Commonly used as locking device on medical carts (see also our 724VR medical cart/ file cabinet lock for use on medical carts)
- Body: Zinc die cast

G

5/8

3/4

- Cylinder: Zinc die cast pin tumbler, drilled for 7 pins Standard function: Key removable in locked or unlocked position.
- Key retaining function: Alternate key-retaining shifters (page 63) are available separately for key removable in locked position only.
- Cams: 2 reversible cams work in all positions Finish: 26D
- Packaged: Packed 10 per box

KEYING INFORMATION

Keyways: A,B,E,F,G,J,K,L,R Keys: Includes 2 keys per lock Stock keying: O-Bit


- Keying: Custom and/or masterkeying available. Specify at time of order.
- Rekeying: Use special pin spring p/n S-SPRING.

INCLUDED ACCESSORIES

Trim collar and parts in chart below.

OPTIONAL ACCESSORIES

See pages 78-79 for a complete list of optional cam sizes and other accessories for use with B7 Series cam locks.

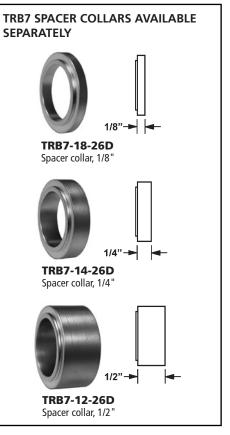

The following warning is applicable to all parts listed on this page: WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. for more information go to www.P65Warnings.ca.gov.